


Data Sheet

2025-03-03

Fiber Optic Breakout Cable

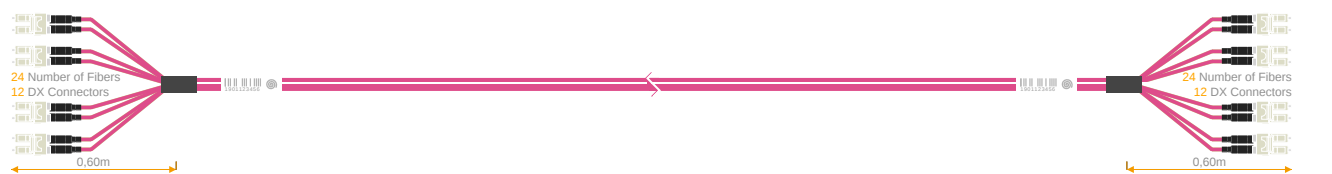

Connector Side A



Cable cross-section scheme



Connector Side B

Connector Side A			Connector Side B	
LC/UPC Multimode DX		Connector Description Design Specification Manufacturer Ferrule Operation Temperature Material of Ferrule Plug Cycles Typical Insertion Loss (IL) Bend Protection Whip	LC/UPC Multimode DX	
IEC 61754-20, JIS C 5964-20			IEC 61754-20, JIS C 5964-20	
Seikoh Giken			Seikoh Giken	
Ø1.25mm, ceramics, axial suspended			Ø1.25mm, ceramics, axial suspended	
-40°C to +75°C			-40°C to +75°C	
Plastic / beige			Plastic / beige	
500			500	
≤ 0.20 dB			≤ 0.20 dB	
black			black	
0,60m			0,60m	
Cable				
Cable Type	I-V(ZN)HH	Manufacturer	WEINERT	
Number of Fibers	24	Fiber Class	OM4 BI	
Outer diameter	14.2mm	Cable Color	heather violet	
Cloak Material	FRNC	Pull Strength	1000N	
Cable Weight	200Kg/km	Operation Temperature	-25°C to +70°C	